MICRO-CYLINDRICAL POCKET HOOP INSTALLATION INSTRUCTIONS

Overview

Congratulations on your purchase of the Micro-Cylindrical Pocket Hoop system, enabling you to embroider on finished pockets and other small tubular garments!

The following instructions are provided to help with the installation and use of the Micro-Cylindrical Pocket Hoops (Melco Part numbers 33289, 33290, 33291).

Note: Although the Micro-Cylindrical Pocket Hoop system can be attached to most Melco cap driver systems, it is best used with latest AMAYA 2005 or XT models and the XT Wide Angle Cap Frame (WACF) driver, PN 32884 (shown in picture 1). The XT WACF driver is not compatible with AMAYA models prior to the 2005 and XT models.

Required Material


- 1. AMAYA 2005 or XT model embroidery system
- 2. AMAYA XT WACF (Wide Angle Cap Frame) Driver PN 32884

Installation Instructions


- 1. Install the Wide Angle Cap Frame Driver on your AMAYA machine as shown in picture 1 and open the top 2 Locking Clamps on the driver ring.
- Select the size Pocket Hoop you intend to use from the drop down list in AMAYA OS.
- 3. Hoop the garment into the Pocket Clamp.
- 4. Rotate the driver to the right (clockwise) so that the alignment tab is located as shown in Picture 2.
- 5. Install the Pocket Hoop as shown in Pictures 2 and 3 (note that the garment is not shown). The alignment tab should fit into the slot located in the middle of the mounting bracket on the Pocket Hoop. Lock down all 3 of the locking clamps on the WACF driver ring. Although the lower, third clamp is not used to hold the Pocket hoop in place, it will interfere with the base cover on the AMAYA unit if it is left in the open position. If the garment is a tubular garment such as a pocket or sock, make sure that garment encircles the lower arm and does not get trapped between the hoop and the lower arm. This will result in the front of the garment being sewn to the back of the garment!
- 6. Load and center the design to be sewn and begin sewing. The hoop and garment should appear as shown in Picture 4.

Melco PN: 33297 Page 1 of 3

Melco | Saurer




Picture 1: AMAYA XT with XT WACF Driver (note that the top 2 Locking Clamps are in the open position)

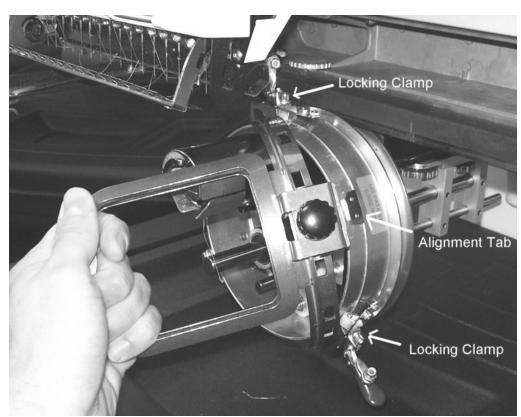

Picture 2: Hoop Installation

Melco PN: 33297 Page 2 of 3

Melco | Saurer

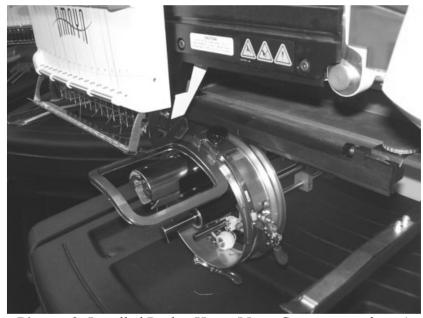

Picture 3: Installed Pocket Hoop (Note: Garment not shown)



Picture 4: Installed Pocket Hoop with Garment

Melco PN: 33297 Page 3 of 3